

MAX

LETATWIN



NEW MODEL



-



DEVELOPED FOR MAXIMIZING CABLE MARKING JOB PRODUCTIVITY



Long consumable roll length

LM-550A/PC adopts the dedicated consumables which have a longer roll length. Long roll length saves reloading time.

LM-IR300B ink ribbon for LM-390A	50 meters
LM-IR50B ink ribbon for LM-550A	110 meters
LM-TP3xxx tape for LM-390A	8 meters
LM-TP5xxW (White) for LM-550A	16 meters

*LM-TP5xxT (Transparent) and TP5xxY (Yellow) remain as 8meters.

High-speed marking


LM-550A/PC has an enhanced feeding system that provides you with marking speed at 40mm/second. LM-550A/PC can make approx 52pcs of 20mm-length tube per minute.

For marking on Tube	Marking time	
LM-390A	100	
MAX previous model		
LM-550A	88	Saving time 12%!!

Maximum 250,000 characters built-in large memory storage

Easy access from your PC with USB

LM-550A/PC features a USB port for a direct cable connection with a WindowsPC (for direct printing or file transfers), and a USB flash drive slot for transferring computer files made in our dedicated "LETATWIN PC EDITOR" software.

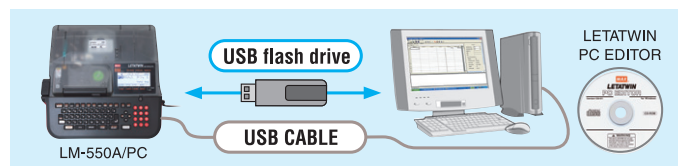

SPECIFICATIONS


ITEMS	CONTENTS
Name	MAX ELECTRONIC LETTERING MACHINE LM-550A/PC
Dimensions	295 (W) × 293 (D) × 94 (H) mm
Weight	2.4kg
Printing method	Thermal transfer method (300dpi)
Display	LCD dot matrix : 64×160 Pixel (Backlit)
Printing speed	40mm/s (Standard) 20mm/s (Low temperature mode)
Maximum Printing length	Tube : 20m, Tape : 5m By multiple copy printing, maximum 30copies, upto Tube ; 100m, Tape ; 7m
Maximum number of characters to input	5,000 characters per file
Character size	1.3, 2, 3, 4, 6mm height
Usable tube	φ1.5mm ~ 8.0mm (PVC tube) (For φ1.5~2.0mm tubes, the dedicated attachment (standard accessory) is required.) φ2.0mm ~ 6.5mm (Heat Shrinkable tube)
Usable tape	Width 5, 9, 12mm (Max genuine tape)
Tube cutting method	Auto half cut, manual full cut
Internal memory	250,000 characters (Maximum 50 files)
External memory	USB memory
Interface	USB 2.0 full speed
Power supply	DC12V, 3.0A <small>Use only specified AC Adapter (100V~240V) included in the package</small>
Power consumption	Max 30W
Operating environment	10°C to 35°C

PC REQUIREMENTS For Windows 10 / 8.1 / 8 / 7 operating systems. Windows® is a registered trademark of Microsoft Corporation(US) in U.S.A. or other countries.

Versatile marking capability

Various marking media and sizes

- φ1.5~φ8.0mm PVC tubes
- φ2.0~φ6.5mm Heat Shrinkable tubes
- 5mm/9mm/12mm wide MAX dedicated tapes



● I.D. plates

● Oval tubes *For the availability of European style marking media, please contact our distributor.

To optimize printing quality, multiple combinations of settings (such as vertical/horizontal print positions and print density) can be saved to support European style marking media etc.

Large and backlit LCD display


Backlit LCD display makes your confirmation of input contents easy, even if you work in a dim jobsite.



The pitch can be set up to maximum 60mm.

Marking on tape : 4 up to 60mm

Marking on tube : 10 up to 60mm *(Auto pitch function is available for more than 60mm)*



Economical refill-type ink ribbon.



PRINTER SUPPLIES and MEDIA

INK RIBBON CASE LM-RC500	20PCS/CTN	UL RECOGNIZED TUBE 1ROLL/BOX
		LM-TU332N2 WHITE φ3.2mm×100m/ROLL
		LM-TU336N2 WHITE φ3.6mm×100m/ROLL
		LM-TU342N2 WHITE φ4.2mm×80m/ROLL
		LM-TU352N2 WHITE φ5.2mm×80m/ROLL
ECONOMICAL INK RIBBON REFILLS LM-IR50B (BLACK)	10 ROLLS/BOX 110m/ROLL	MAX HIGH QUALITY TUBE 1ROLL/BOX
		LM-TU432L WHITE φ3.2mm×200m/ROLL
		LM-TU436L WHITE φ3.6mm×200m/ROLL
		LM-TU442L WHITE φ4.2mm×200m/ROLL
		LM-TU452L WHITE φ5.2mm×135m/ROLL
		LM-TU464L WHITE φ6.4mm×100m/ROLL
		LM-TU480L WHITE φ8.0mm×70m/ROLL
INK RIBBON REFILLS FOR HEAT SHRINKABLE TUBE LM-IR508P (BLACK)	10 ROLLS/BOX 110m/ROLL	
LM-IR50W (WHITE)	70m/ROLL	

TAPE CASSETTE LM-TP505W (WHITE)	10PCS/BOX 5mm(W)×16m(L)/PC
LM-TP505Y (YELLOW)	5mm(W)×8m(L)/PC
LM-TP505T (TRANSPARENT)	5mm(W)×8m(L)/PC
LM-TP509W (WHITE)	9mm(W)×16m(L)/PC
LM-TP509Y (YELLOW)	9mm(W)×8m(L)/PC
LM-TP509T (TRANSPARENT)	9mm(W)×8m(L)/PC
LM-TP512W (WHITE)	12mm(W)×16m(L)/PC
LM-TP512Y (YELLOW)	12mm(W)×8m(L)/PC



The specifications and design of the products in this catalogue will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



Tech & Time System Co.,Ltd. | www.tech-time.co.th

75/46 M.11 Phaholyothin Rd. Klongnueng Klongluang Phatumthani Thailand 12120

Tel. 0-2529-6344 Fax. 0-2529-6345 Hotline. 08-6340-1848, 08-6342-3004 Line ID. Sales-tech