
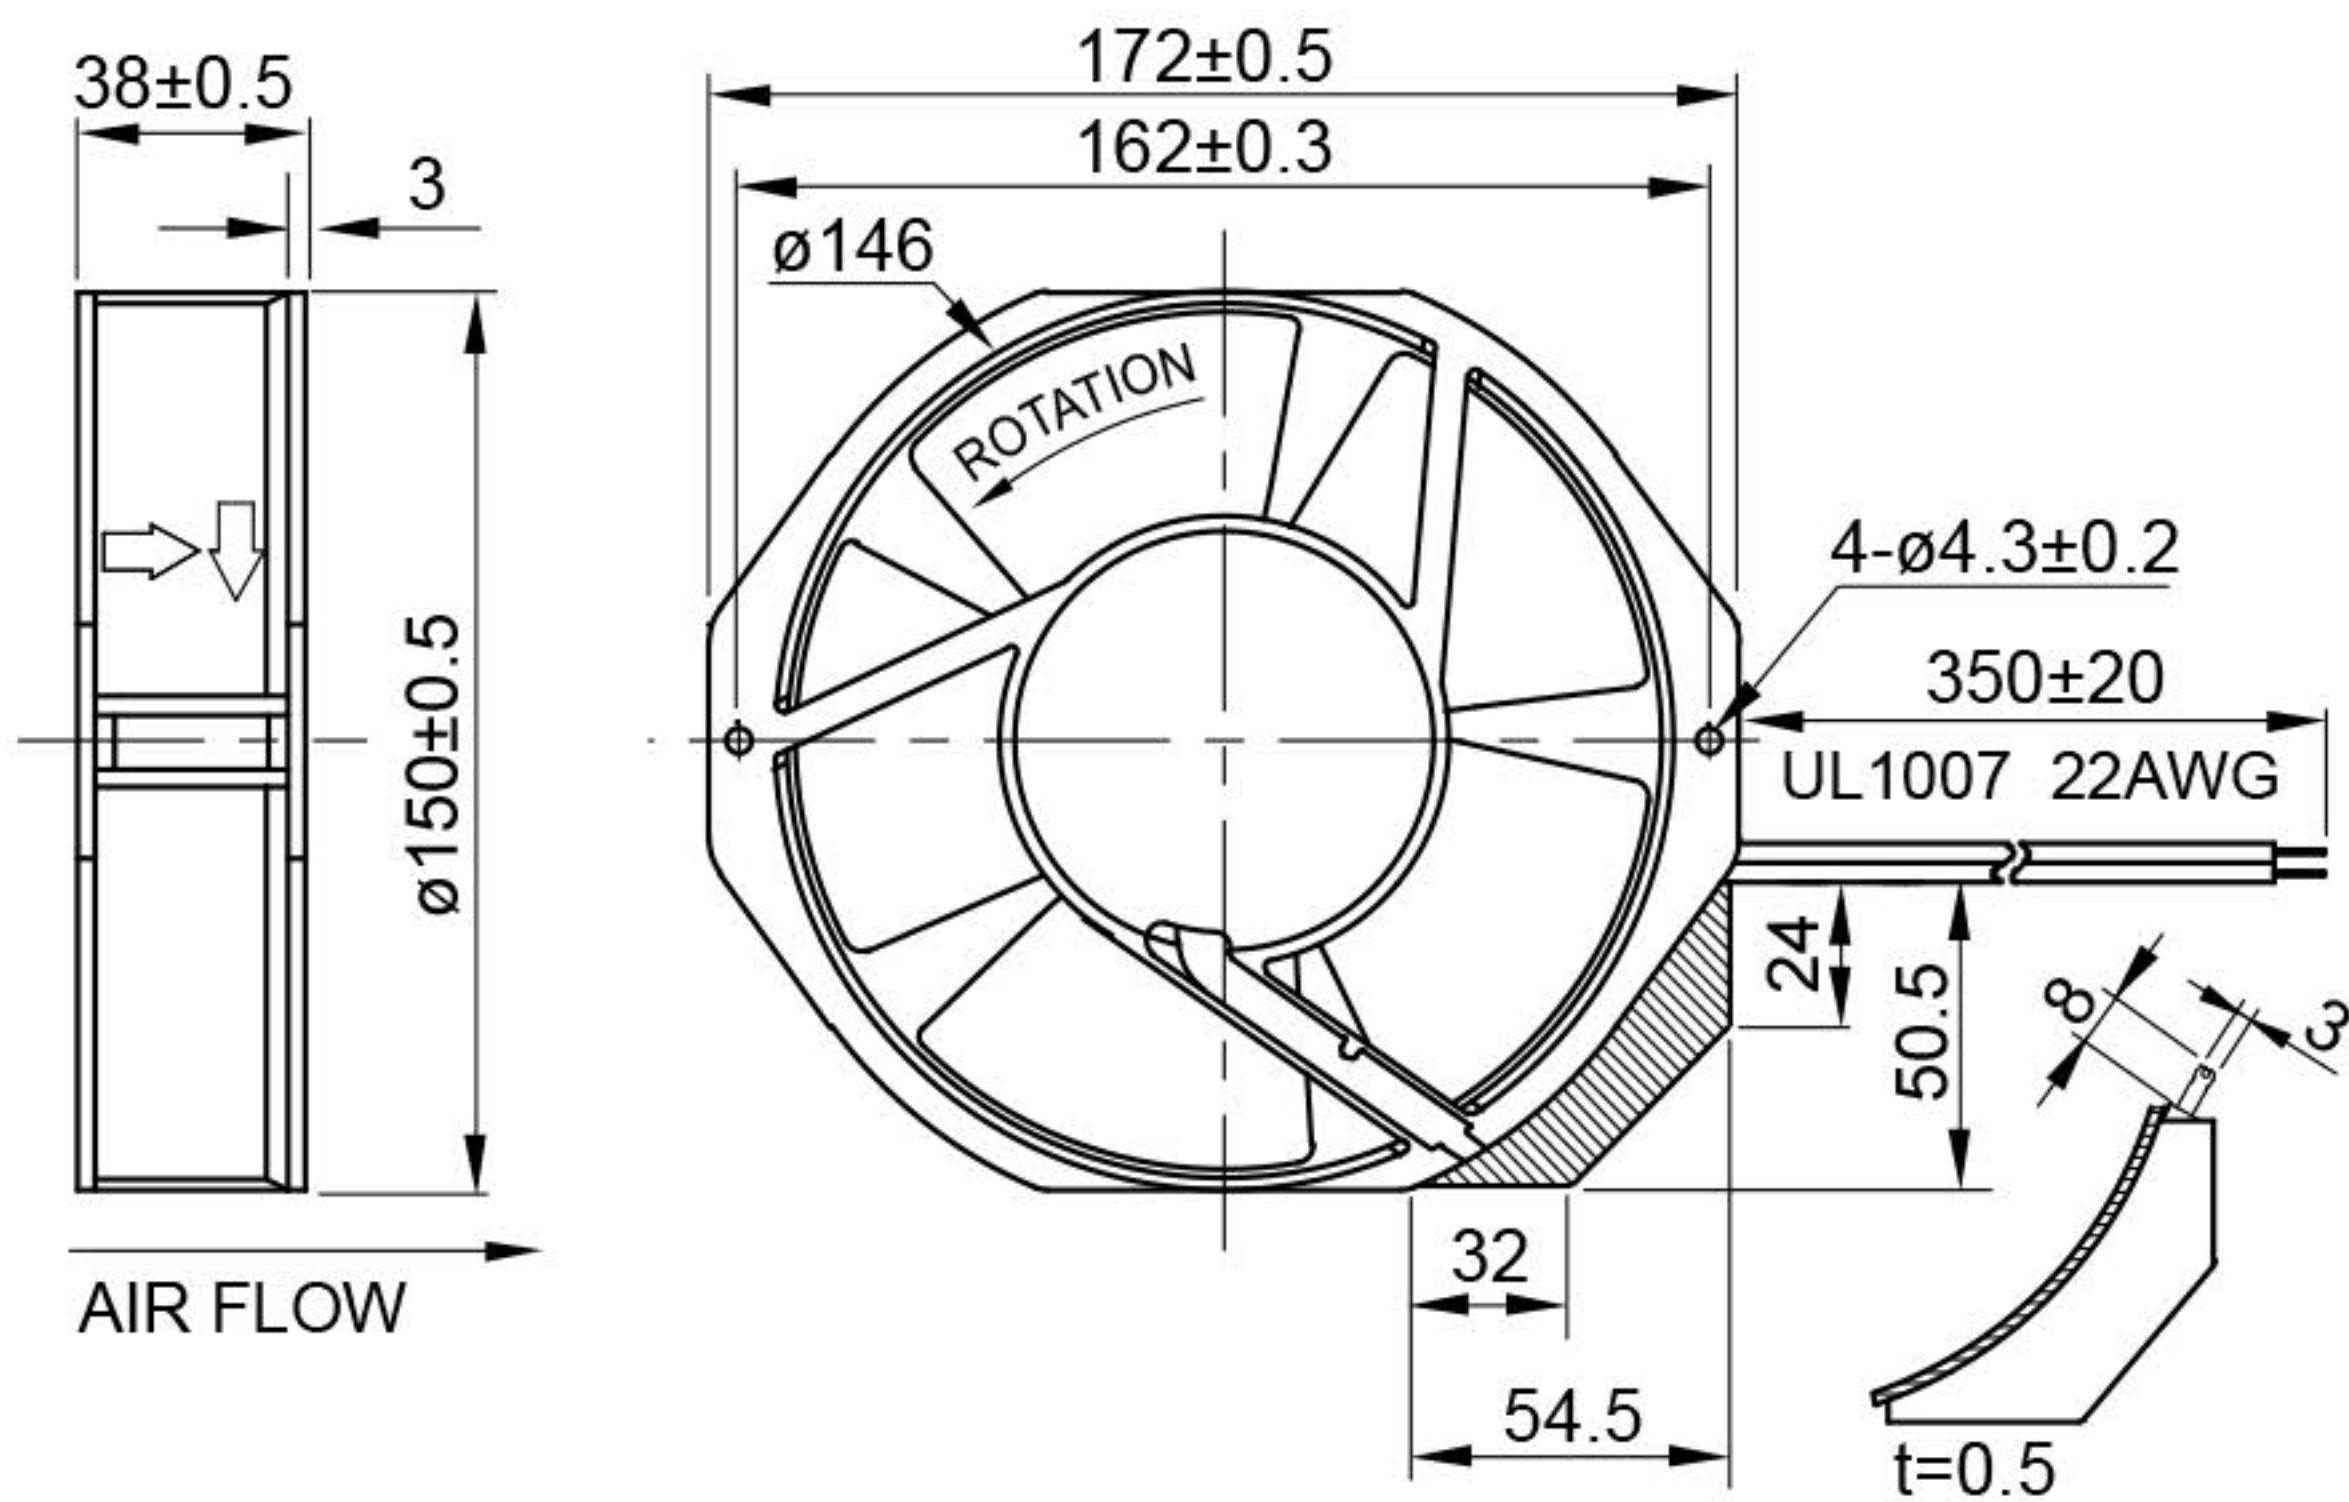


UF15A(C) Series

Size 172 x 150 x 38
Unit : mm

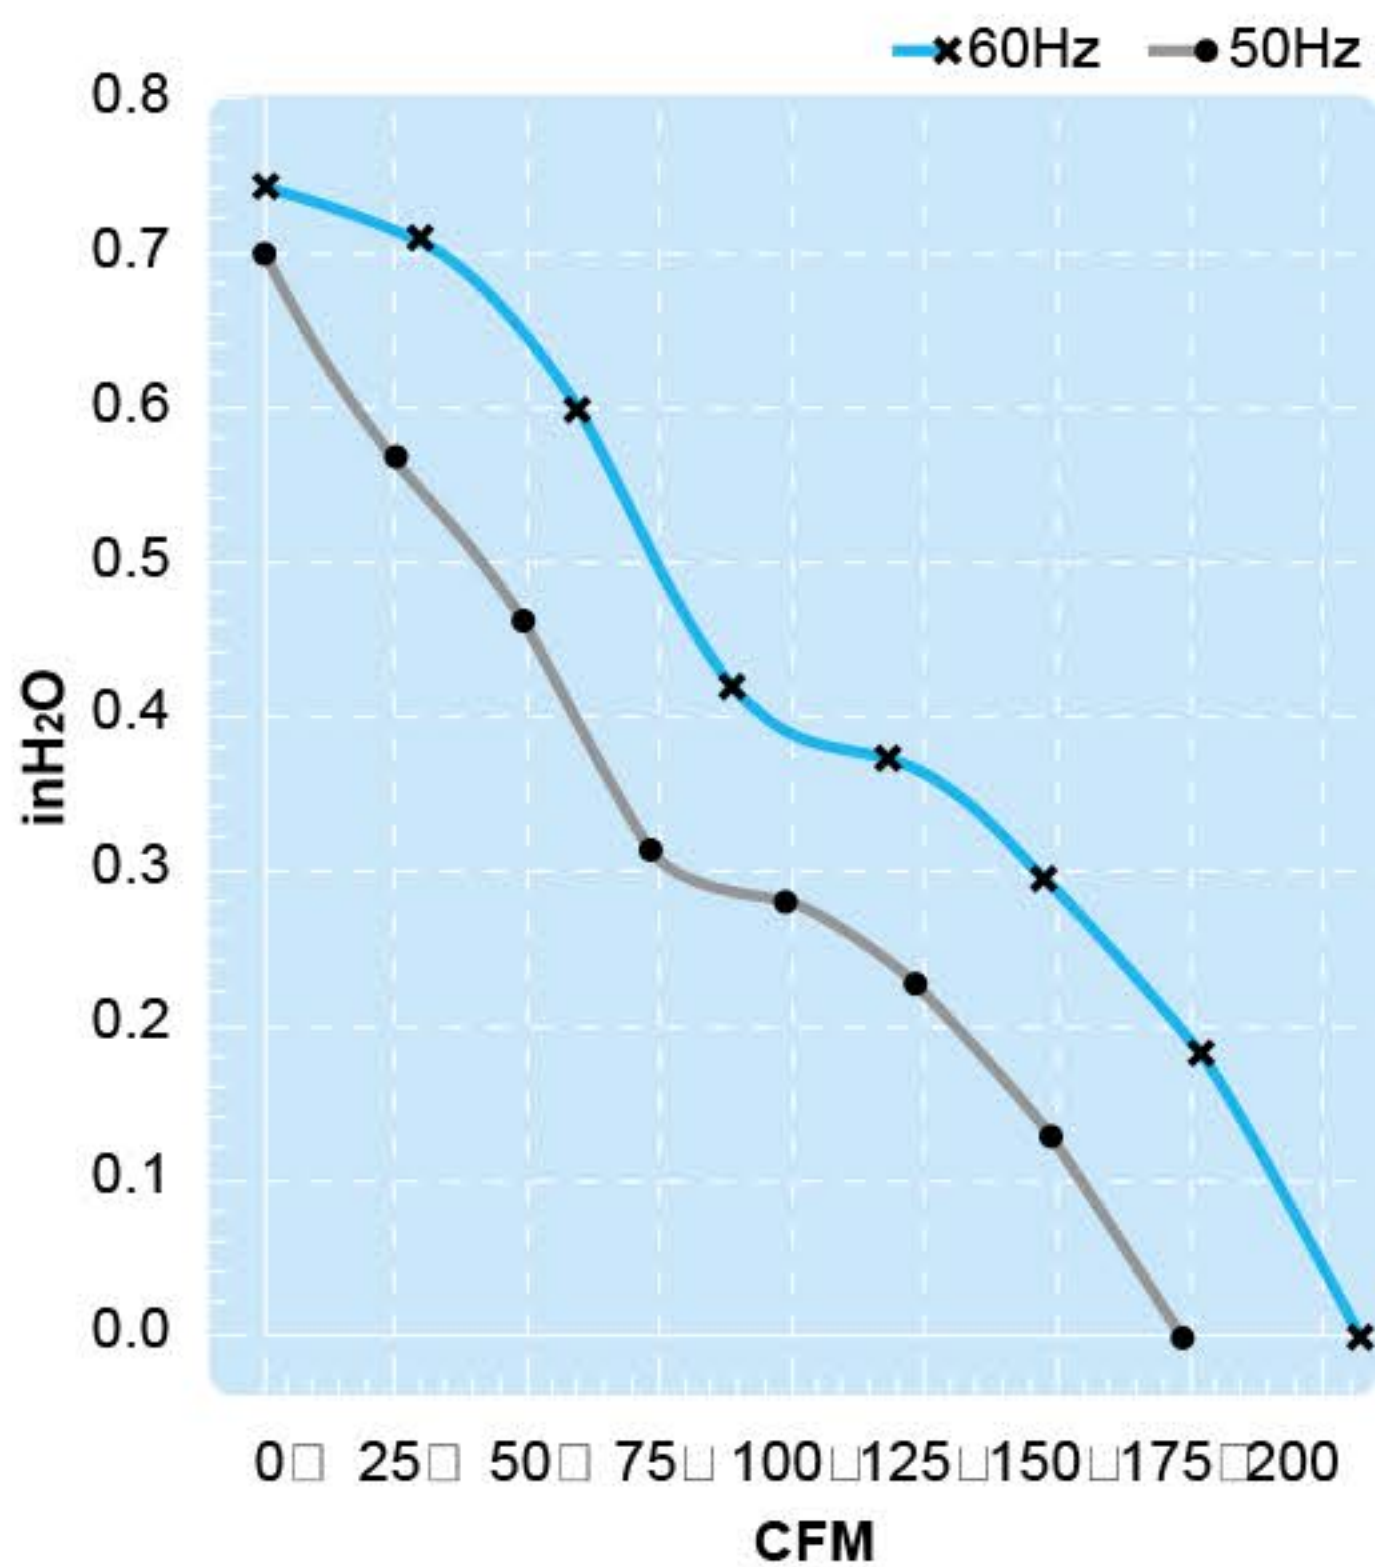

Terminal or Lead Wire Type

Thermal Protection

Spec. Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight kg
UF15AC10-H	100V	50 60	27 25	0.29 0.25	0.47 0.47	2850 3400	5.0 6.0	177 212	17.0 19.0	0.67 0.75	54 58	0.72
UF15AC11-H	115V	50 60	29 28	0.25 0.23	0.36 0.38	2850 3400	5.0 6.0	177 212	17.0 19.0	0.67 0.75	54 58	0.72
UF15AC20-H	200V	50 60	27 25	0.13 0.12	0.21 0.22	2850 3400	5.0 6.0	177 212	17.0 19.0	0.67 0.75	54 58	0.72
UF15AC23-H	230V	50 60	27 26	0.11 0.11	0.18 0.18	2850 3400	5.0 6.0	177 212	17.0 19.0	0.67 0.75	54 58	0.72
UF15AC11-L	115V	50 60	29 28	0.17 0.15	0.20 0.20	1400 1700	2.4 2.9	85 103	4.50 6.50	0.18 0.26	38 44	0.72
UF15AC23-L	230V	50 60	27 26	0.08 0.07	0.10 0.10	1400 1700	2.4 2.9	85 103	4.50 6.50	0.18 0.26	38 44	0.72