
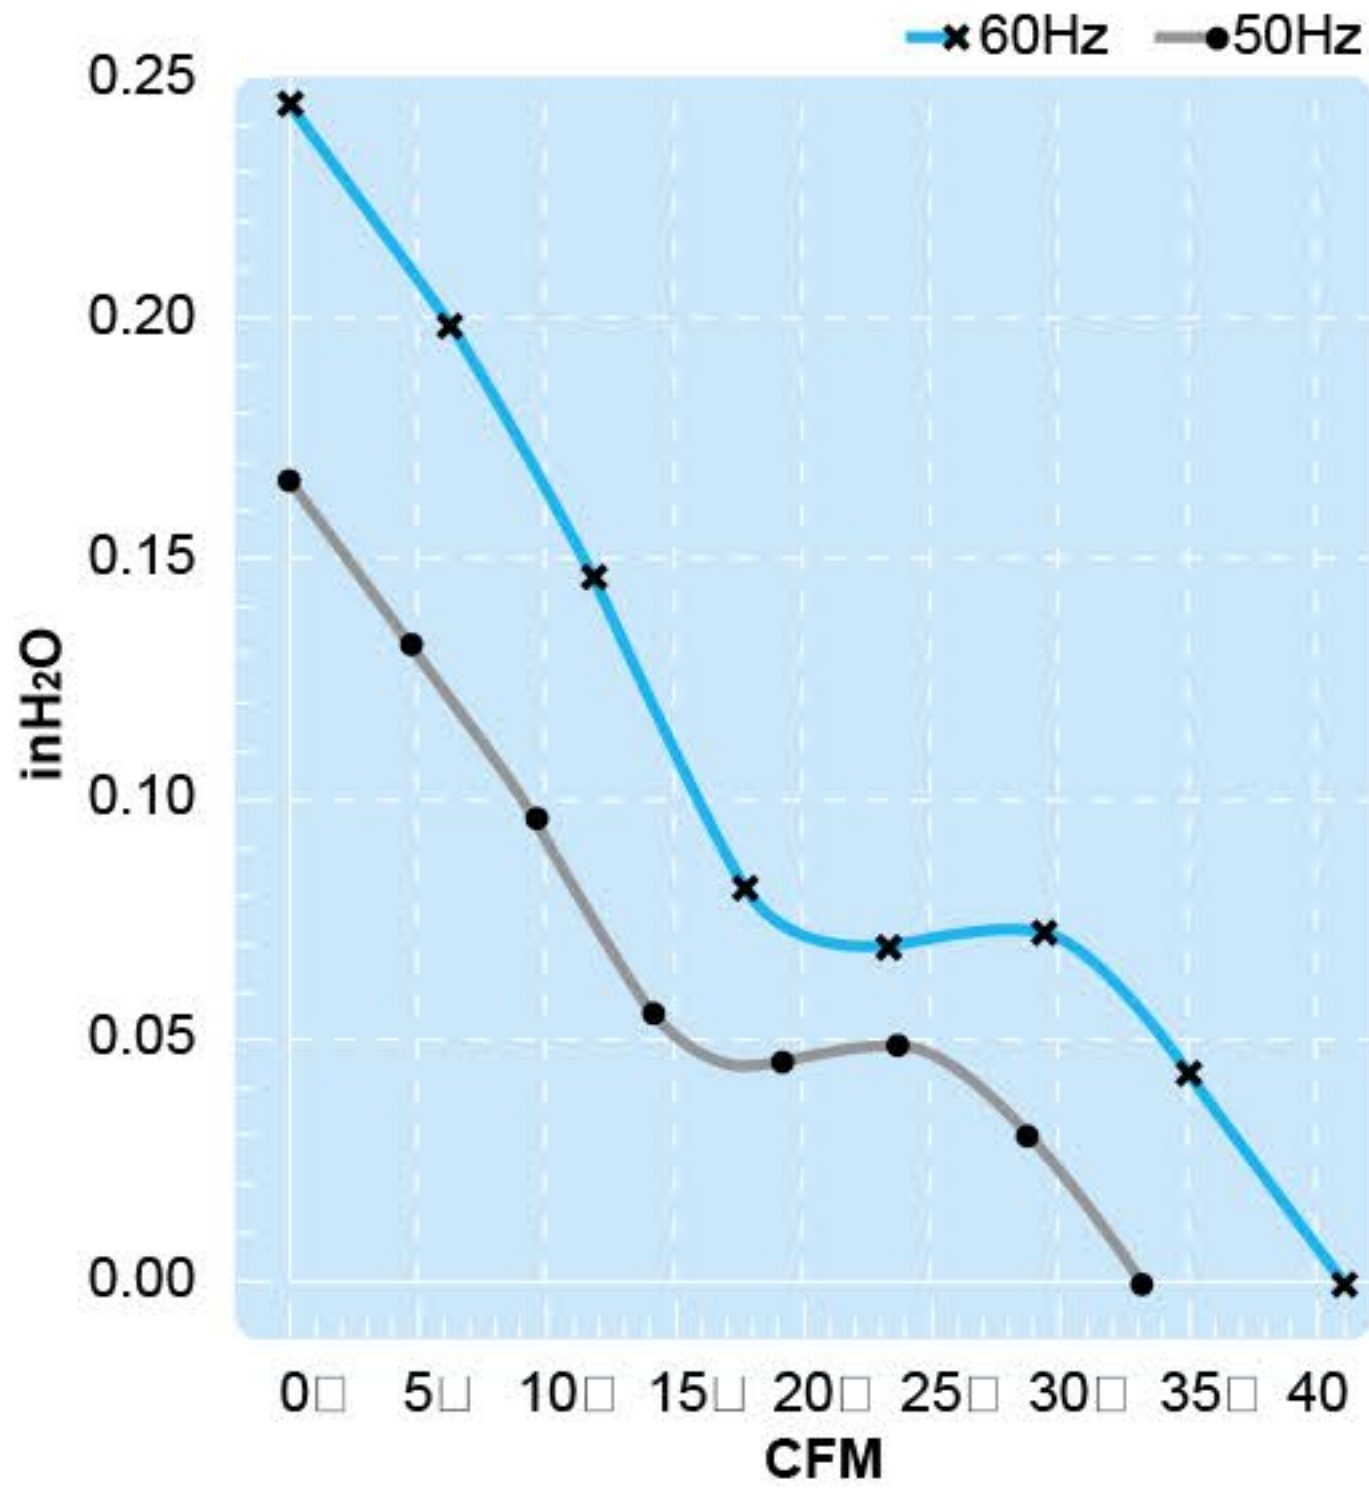


UF92B Series

Size 92 x 92 x 25
Unit : mm

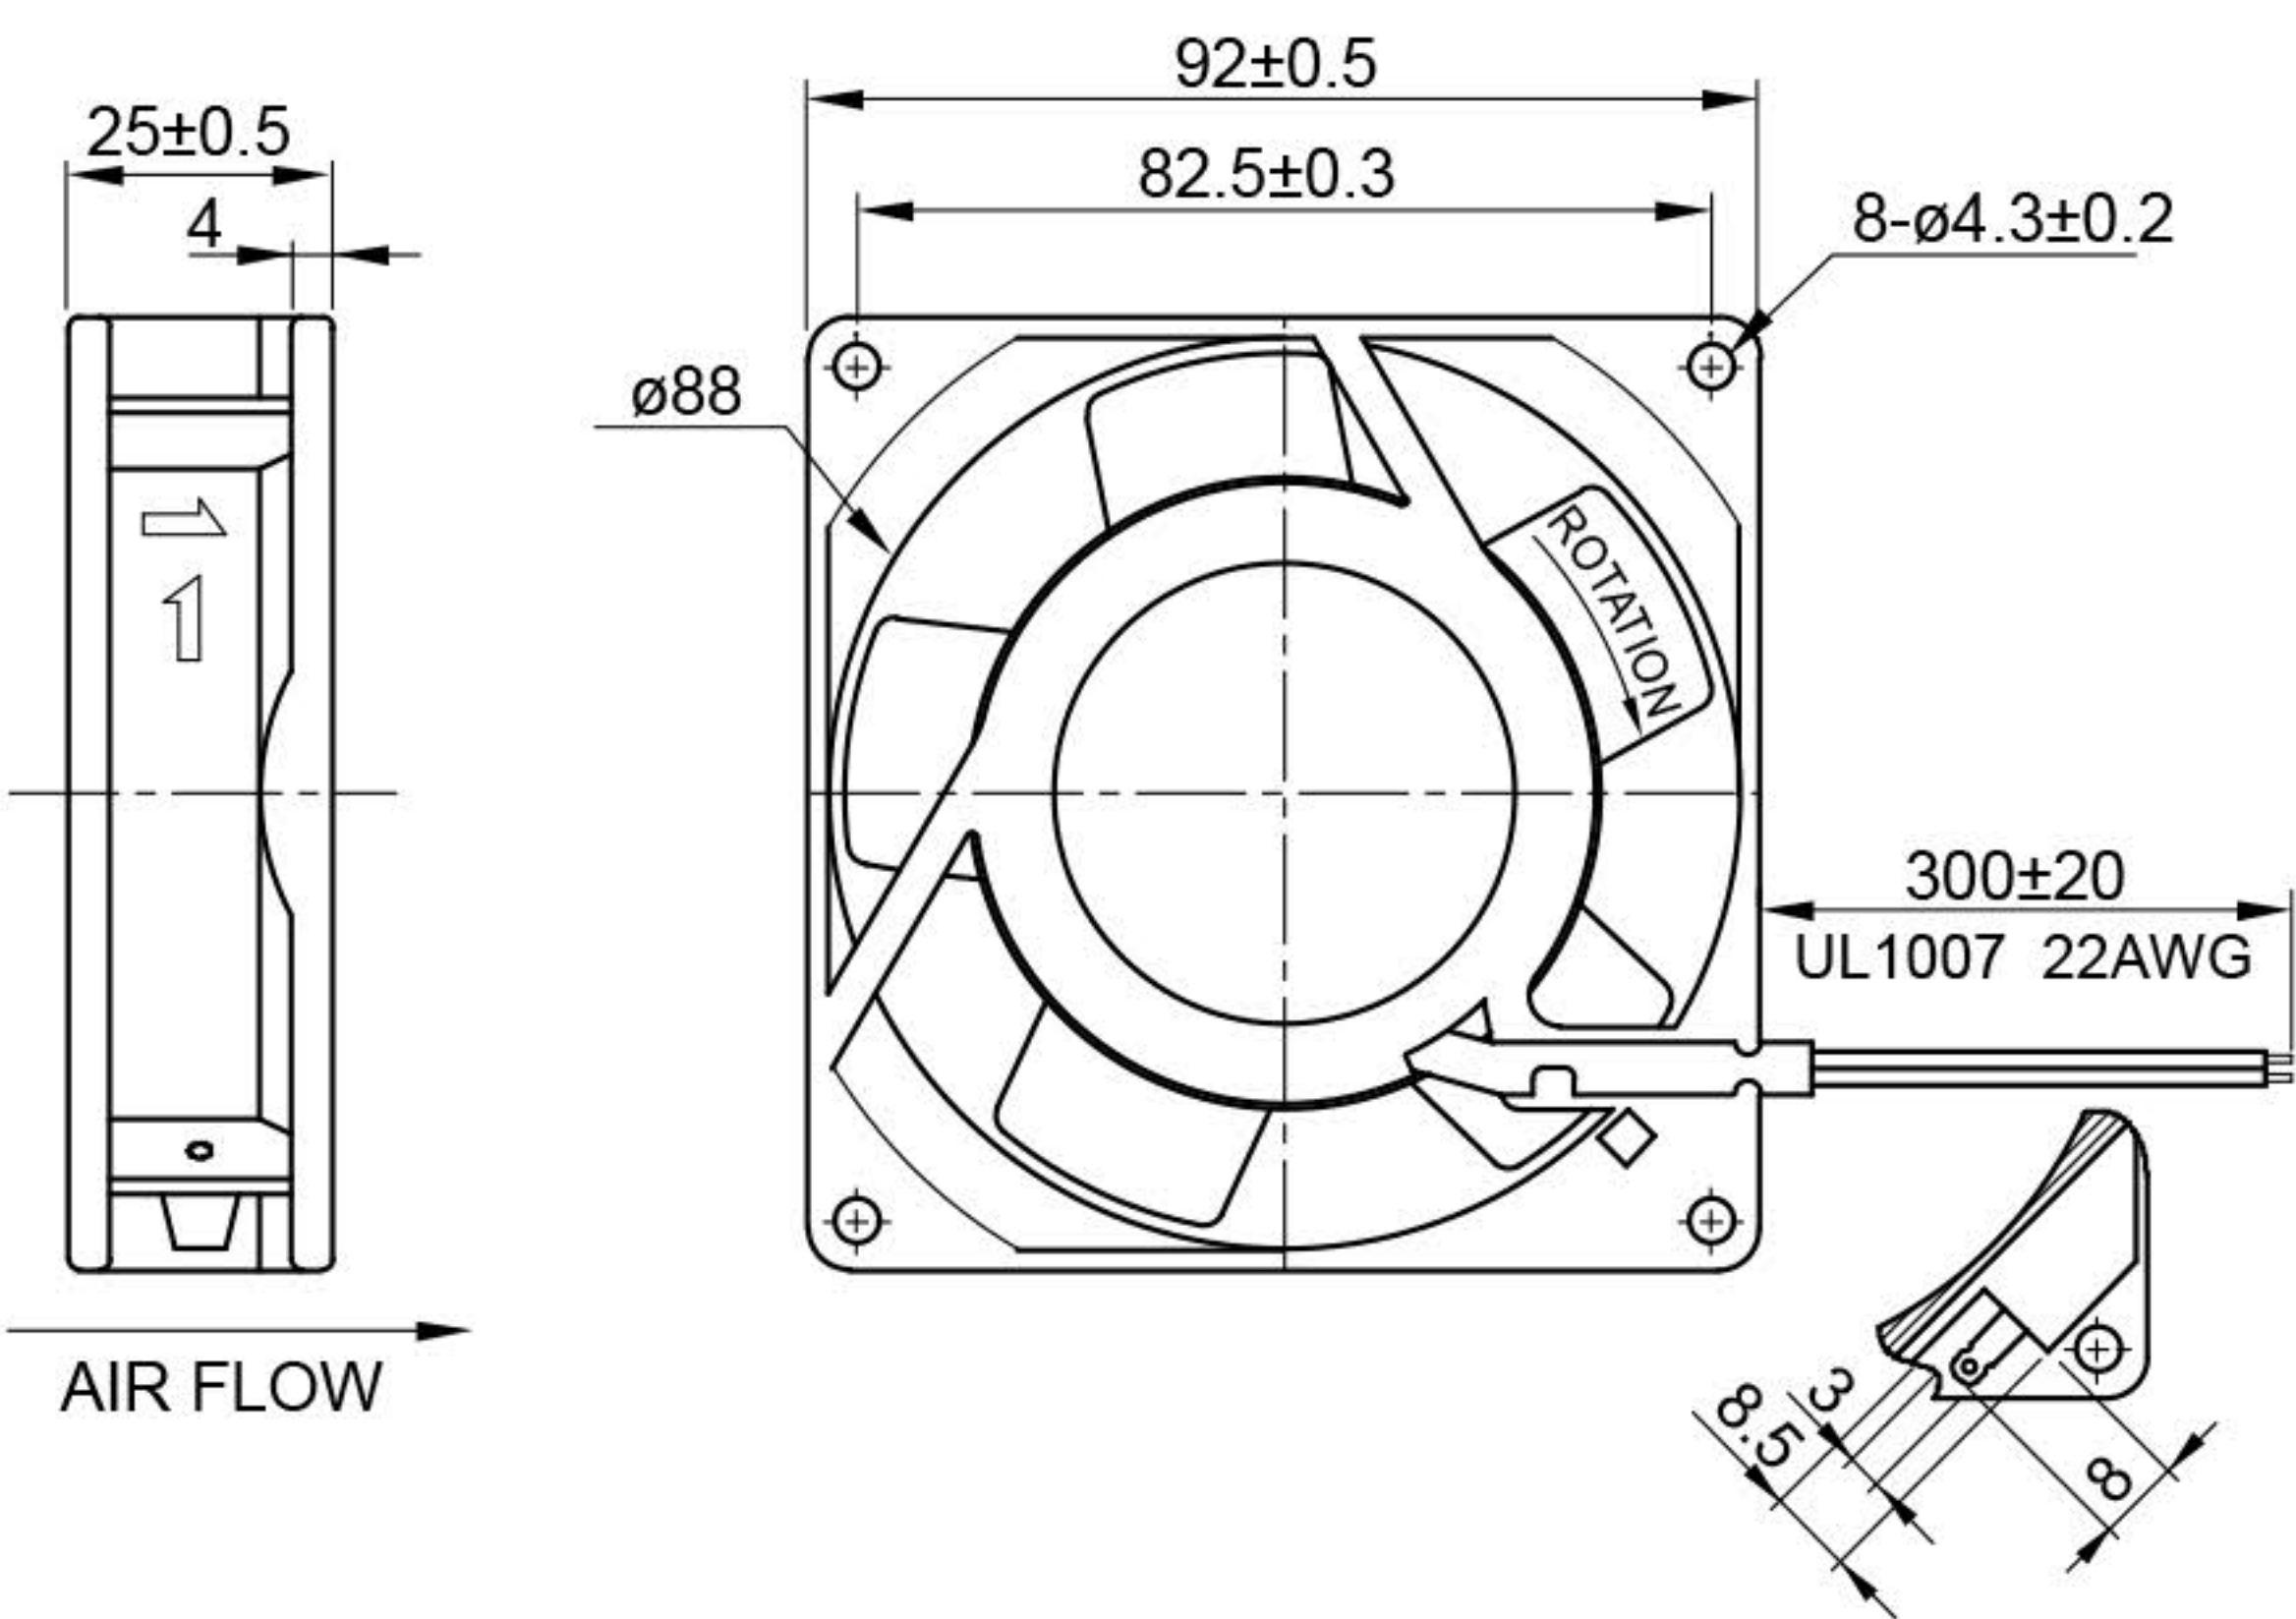

Impedance Protection

Terminal or Lead Wire Type



Spec. Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight kg
UF92B10-H	100V	50 60	16 14	0.19 0.18	0.20 0.19	2500 3000	0.93 1.13	33 40	4.5 6.5	0.18 0.26	32 36	0.28
UF92B11-H	115V	50 60	14 11	0.15 0.12	0.16 0.13	2500 3000	0.93 1.13	33 40	4.5 6.5	0.18 0.26	32 36	0.28
UF92B20-H	200V	50 60	16 14	0.08 0.07	0.09 0.08	2500 3000	0.93 1.13	33 40	4.5 6.5	0.18 0.26	32 36	0.28
UF92B23-H	230V	50 60	16 14	0.08 0.07	0.09 0.08	2500 3000	0.93 1.13	33 40	4.5 6.5	0.18 0.26	32 36	0.28
UF92B11-L	115V	50 60	14 11	0.14 0.11	0.15 0.12	1800 2300	0.55 0.70	20 25	2.5 4.0	0.10 0.16	28 32	0.28
UF92B23-L	230V	50 60	16 14	0.07 0.06	0.08 0.07	1800 2300	0.55 0.70	20 25	2.5 4.0	0.10 0.16	28 32	0.28