
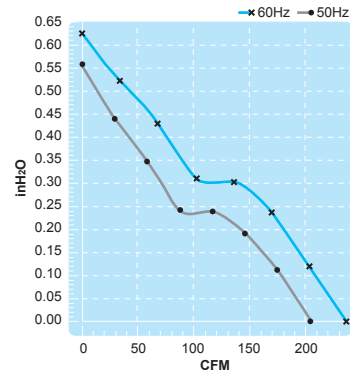


# UF15K(ME) Series

Size :  $\varnothing 136 \times 58$   
Unit : mm

\* Metal Impeller

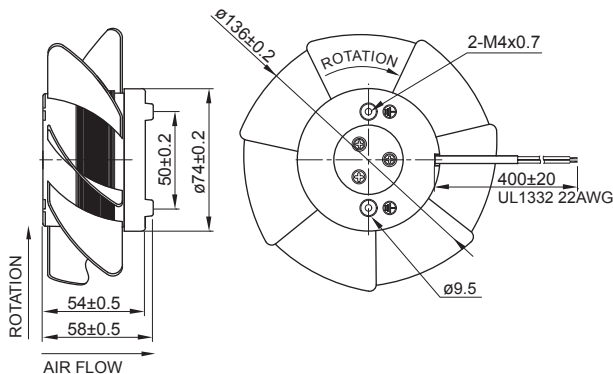

Thermally-Protected

Lead Wire Type



| Spec. / Model | Rated Voltage V | Frequency Hz | Input Power W | Rated Current A | Locked Current A | Speed RPM | Maximum Air Flow m <sup>3</sup> /min. | Maximum Air Flow CFM | Maximum Pressure mmH <sub>2</sub> O | Maximum Pressure InchH <sub>2</sub> O | Noise dB | Weight kg |
|---------------|-----------------|--------------|---------------|-----------------|------------------|-----------|---------------------------------------|----------------------|-------------------------------------|---------------------------------------|----------|-----------|
| UF15KME11-H   | 115             | 50           | 42            | 0.51            | 0.87             | 2800      | 5.5                                   | 195                  | 14                                  | 0.55                                  | 45       | 0.91      |
|               |                 | 60           | 42            | 0.46            | 0.74             | 3250      | 6.5                                   | 230                  | 16                                  | 0.63                                  | 50       |           |
| UF15KME23-H   | 230             | 50           | 42            | 0.25            | 0.43             | 2800      | 5.5                                   | 195                  | 14                                  | 0.55                                  | 45       | 0.91      |
|               |                 | 60           | 42            | 0.23            | 0.37             | 3250      | 6.5                                   | 230                  | 16                                  | 0.63                                  | 50       |           |