



Size : 402 x 100 x 90
Unit : mm

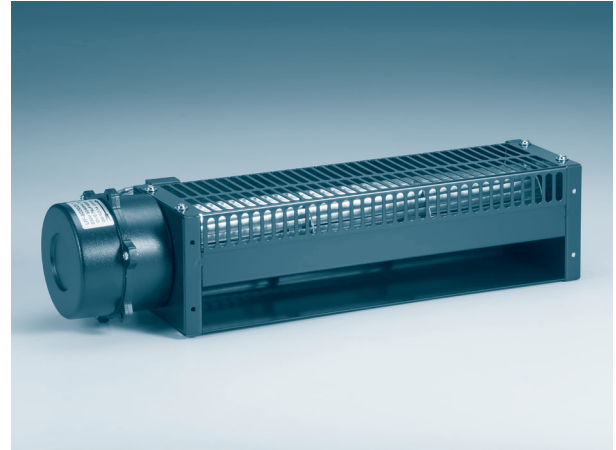

Thermally-Protected

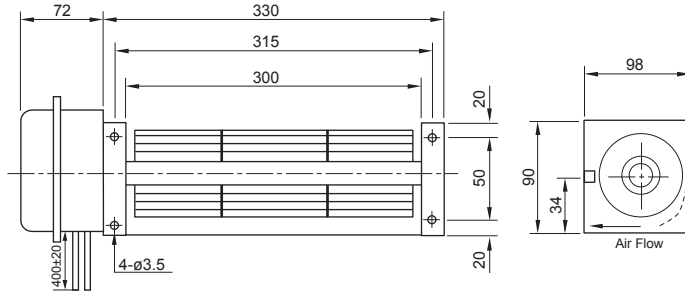

Spec. / Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight kg
UF6030CBA12HL	120	50	35	0.33	0.46	2600	5.0	177	5.0	0.20	50	2.0
		60	37	0.33	0.46	3000	5.5	195	7.5	0.30	53	
UF6030CBA23HL	230	50	35	0.17	0.22	2600	5.0	177	5.0	0.20	50	2.0
		60	37	0.17	0.22	3000	5.5	195	7.5	0.30	53	